

Why choose our Pool Cover Profiles?



NEATNESS AND COMFORT

Pool Cover Profiles contribute to the **neatness** of your pool. Dirt, like leaves or grass, are kept away from the pool so the water remains clean and pleasant.

ANTI-ALGAE

Our profiles are the **perfect prevention against algae**. They have a specific design that consists out of **four chambers**. Three chambers are closed and one is open. The bottom of the open chamber, is provided with several openings. This ensures water is constantly rinsing the chamber which prevents the formation of algae.

SECURITY

When your pool is unsupervised, our pool cover profiles will help to **keep your family safe**. Wandering children or pets won't end up in the pool when you aren't around.

We offer standard PVC profiles and new in our range of products are our **polycarbonate profiles**.

Our polycarbonate profiles are **progressive in the market** of pool cover profiles and their quality is exceptional.

These profiles are **impact and UV resistant**. They have been tested and rated with hail resistance class 5, which is the top rating according to the VKF-institute.

ENERGY-SAVING





Both our PVC and polycarbonate profiles have **solar** varieties. The bottom of the solar profile has a specific black layer. This **absorbs the sunlight** and causes the air in the profiles to heat up. The top layer of the pool will warm up and the circulation system will mingle the water. The difference in temperature of the whole pool will be noticeably higher. It can lead up to a pool which is **4 to 6 degrees warmer** than one without solar profiles.

Exceptional quality in
polycarbonate

PC60 POLYCARBONATE PROFILES



AVAILABLE COLOURS




Lenght (mm)	ROLL-UP DIAMETER*		Number of Slats
	SHAFT ø 140 mm	SHAFT ø 160 mm	
4000	325	335	67
5000	355	365	83
6000	380	395	100
7000	405	420	117
8000	430	440	133
9000	455	460	150
10000	475	480	167
11000	495	500	183
12000	515	520	200
13000	535	540	217
14000	555	560	233
15000	575	580	250

*preliminary results

TECHNICAL DATA	
Thickness	14 mm
Useful height	60 mm
Weight	3,35 Kg/m ²
Max. surface*	90 m ²






*According to our models and our manufacture

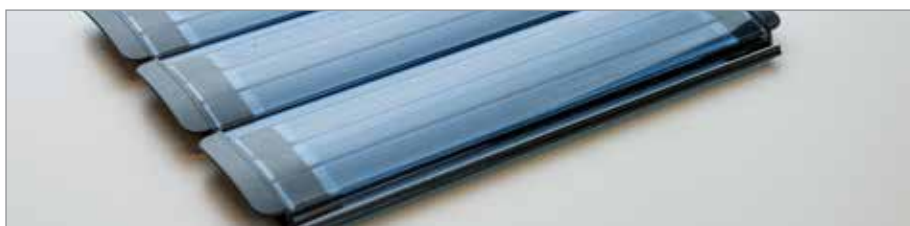

PC75 POLYCARBONATE PROFILES



AVAILABLE COLOURS



Lenght (mm)	ROLL-UP DIAMETER*		Number of Slats
	SHAFT ø 140 mm	SHAFT ø 160 mm	
4000	360	420	56
5000	390	440	69
6000	420	450	82
7000	440	470	95
8000	470	490	108
9000	490	500	121
10000	520	520	134
11000	540	540	147
12000	550	550	160
13000	570	570	173
14000	600	580	186
15000	620	600	200



TECHNICAL DATA	
Thickness	17 mm
Useful height	75 mm
Weight	3,5 Kg/m ²
Max. surface*	120 m ²





*According to our models and our manufacture

PVC

P75 PVC PROFILES



AVAILABLE COLOURS



TECHNICAL DATA	
Thickness	17 mm
Useful height	75 mm
Weight	Unicolour 4,3 Kg/m ² Solar 3,15 Kg/m ²
Max. surface*	90 m ²

*According to our models and our manufacture

Lenght (mm)	ROLL-UP DIAMETER		Number of slats
	SHAFT ø 140 mm	SHAFT ø 160 mm	
4000	360	420	56
5000	390	440	69
6000	420	450	82
7000	440	470	95
8000	470	490	108
9000	490	500	121
10000	520	520	134
11000	540	540	147
12000	550	550	160
13000	570	570	173
14000	600	580	186
15000	620	600	200

